



ES-2000HT Dishmachine


Leasing a dishmachine from Ecolab allows you to focus on your business with the security of knowing your warewashing operation is properly managed.

Superior Cleaning & Reliable Performance

- ▲ High temperature machine helps provide fast drying
- ▲ Self-cleaning internal sump helps ensure a clean final rinse
- ▲ Unique design helps ensure uncontaminated water is used in every cycle



Superior Results, 24-7 Service & A Great Financial Option.

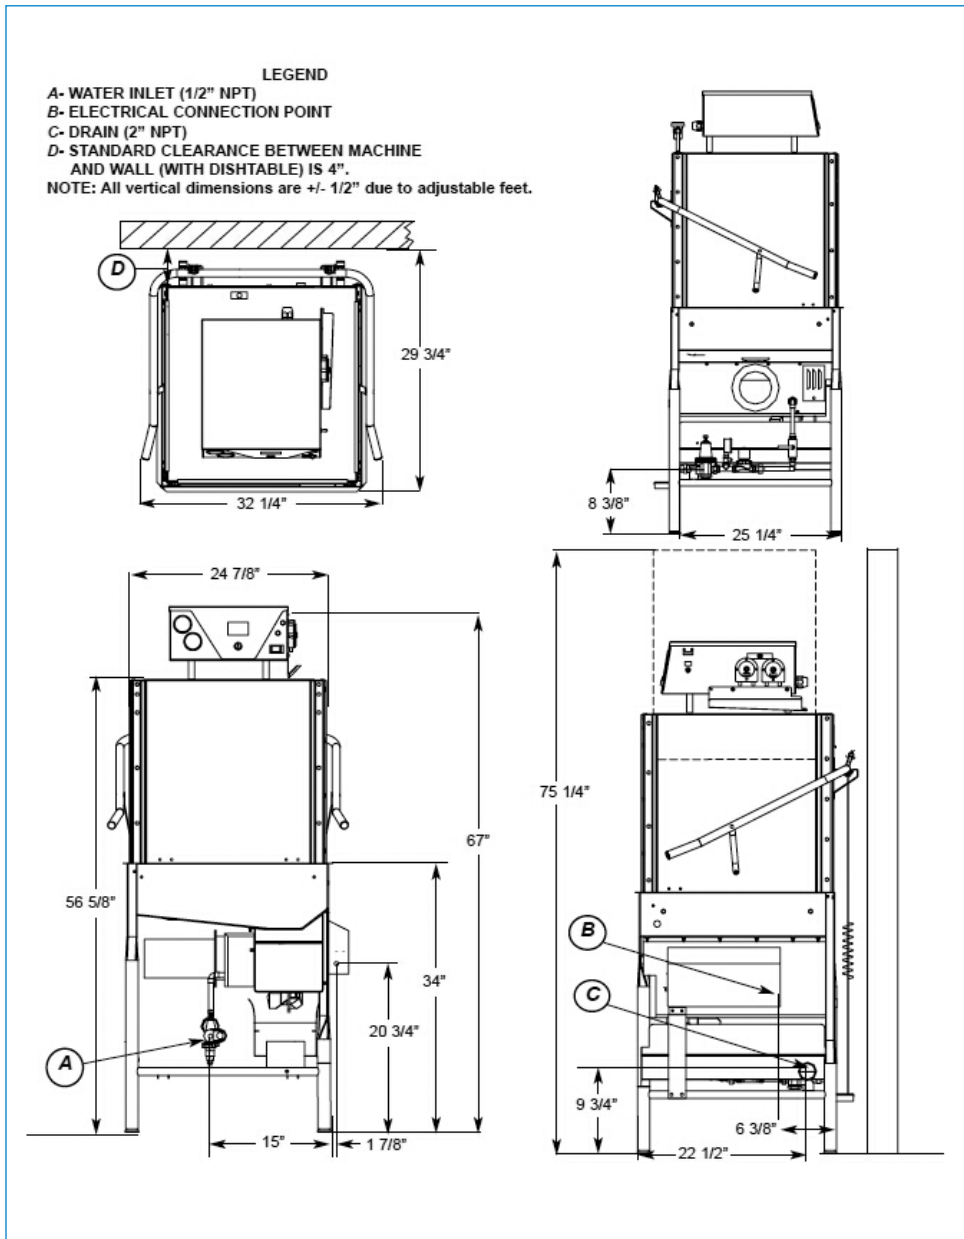

ES-2000HT SPECIFICATIONS:

OPERATING CAPACITY

| | |
|----------------|----|
| Racks per Hour | 55 |
|----------------|----|

OPERATING CYCLE (NORMAL)

| | |
|------------------|----|
| Wash Time | 41 |
| Dwell Time | 8 |
| Rinse Time | 11 |
| Load Time | 5 |
| Total Cycle Time | 65 |

OPERATING TEMPERATURES

| | |
|----------------------------|--------|
| Wash (minimum) | 150° F |
| Sanitizing Rinse (minimum) | 180° F |

WATER CONSUMPTION

| | |
|------------------|------|
| Gallons per Rack | 1.25 |
|------------------|------|

ELECTRICAL RATINGS

| | |
|-----------|--------|
| Wash Pump | 3/4 hp |
|-----------|--------|

WASH CHAMBER

| | |
|--------|-----|
| Height | 17" |
|--------|-----|

WEIGHT

| | |
|----------------|---------|
| Machine Weight | 300 lbs |
|----------------|---------|

UTILITY REQUIREMENTS ELECTRICAL

| | |
|--|--------|
| Voltage/Frequency/Phase: 208V/60Hz/1 Ph | |
| Total Amperage | 75.2 A |
| Minimum Electrical Circuit | 100 A |
| Voltage/Frequency/Phase: 230V/60Hz/1 Ph | |
| Total Amperage | 68.8 A |
| Minimum Electrical Circuit | 90 A |
| Voltage/Frequency/Phase: 208V/60Hz/3 Ph | |
| Total Amperage | 46.8 A |
| Minimum Electrical Circuit | 60 A |
| Voltage/Frequency/Phase: 230V/60Hz/3 Ph | |
| Total Amperage | 43 A |
| Minimum Electrical Circuit | 60 A |

WATER

| | |
|----------------------------|-----------|
| Waterline Size (minimum) | 1/2" |
| Flow Pressure (required) | 15-25 psi |
| Incoming Temperature (min) | 110° F |

DRAIN

| | |
|--------------------------|----|
| Drainline Size (minimum) | 2" |
|--------------------------|----|

VENT HOOD

| | |
|----------------------------|-----|
| Flow-Cubic Feet per Minute | 400 |
|----------------------------|-----|

